

# GreenSmart Series Diverter Valves

## Specification Data Sheet



Valves and wyes shipped unassembled. Valves and actuators assembled together at the factory.

### STANDARDS



ASTM D1784  
ASTM D2466  
ASTM D2467  
ASTM D2464  
ASTM F1498  
ASTM F439  
ASTM F437



IAPMO PS-59-2016a



ANSI B1.20.1  
ANSI B16.5

Manufactured By IPEX

### Product Overview

GreenSmart graywater/rainwater/wastewater diversion systems are designed for commercial, residential, and industrial applications. Code approved, UPC / IPC listed to provide practical solutions for All wastewater diversion applications: Graywater, Rainwater, Stormwater, Septic Tank Diversion, etc. Complies with all New Green Building Codes regarding wastewater, graywater, water recycling, Clean Water Act, Alternative Water Source Uses, etc.

### Greensmart PVC / CPVC Systems Selection

2" 3-Way Manual	PVC	GTKDTBV108
2" 3-Way Manual	CPVC	GTKDTBC108
2" 3-Way Actuated	PVC	GTKDBTV008-EL24VDC
2" 3-Way Actuated	CPVC	GTKDTBC108-EL24VDC
3" Manual Single	PVC	GVVEAV110
3" Manual Single	CPVC	GVXEAC110
3" Actuated Single	PVC	GVVEAV110-EL24VDC
3" Actuated Single	CPVC	GVXEAC110-EL24VDC
3" Actuated Double	PVC	GVVEAV110-EL24VDCx2
3" Actuated Double	CPVC	GVXEAC110-EL24VDCx2
4" Manual Single	PVC	GVVEAV111
4" Manual Single	CPVC	GVXEAV111
4" Actuated Single	PVC	GVVEAV111-EL24VDC
4" Actuated Single	CPVC	GVXEAC111-EL24VDC
4" Actuated Double	PVC	GVVEAV111-EL24VDCx2
4" Actuated Double	CPVC	GVXEAC111-EL24VDCx2


### 2", 3", 4" Dimensions

Size	A	B	C	D	E
2" (GTKD)	18"	10"			
3" (GVVE)	20"	10"	10"	20"	8"
4" (GVVE)	21"	12"	10"	22"	8"

A Overall Height  
B Valve Length  
C Wye Length  
D Overall Length (B+C)  
E Width



2" (GTKD)

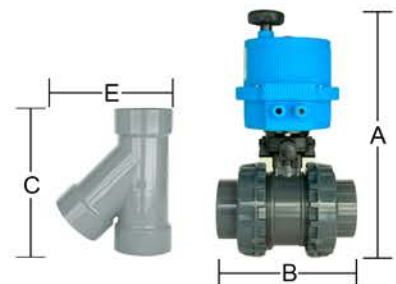

3", 4" (GVVE)



R040919



For more information and pricing - (951) 549-1000

